

Supplies and Accessories

Product Catalog





Table of Contents

_	ng Tools	33 31 25-26 34 37-38
Levels	Abney	18
	Hand	17
Marki		39
	is Iring Tapes	39
Wicast	Chaining Pins	27
	Lufkin	27-29
	Sokkia/Eslon	30
Paint	SORRIGI ESTOTI	40
Planin	neters	16
Plumb	36	
	s, Prism Poles, Accessories	30
	Accessories	9
	Bipods and Tripods	9
	Data Collector Brackets	9
	Prisms	5-6
	Prism Poles	8,10
	Specialty Prisms	7
Reflec Rods	tive Targets	4
	Digital	13
	Nedo Fiberglass	12
	Specialty	14
SK Ro	Replacement Pole Sections	15
Safety	and Accessories	41-43
Specia	lty Poles	
	GPS	11
	Range	11
	Robotics	11
Stered		
	scopes	24
Surve	scopes _V ing Markers	24 35
	•	
Therm	ying Markers	35
Therm	ving Markers nometers	35
Therm	ving Markers nometers ls and Accessories	35 32



Reflective Targets

Reflective Sheet Targets

RS**T 0.3 mm thin, self-adhesive sheets that adhere to almost any surface. RS**N includes normal (0.5 mm) reticle lines.

210210004	RS00 Target 230 x 230 mm (1 each) (SO)
210210005	RS05T Targets 5 x 5 mm (400 each) (SO)
210210006	RS10N Targets 10 x 10 mm (400 each)
210210009	RS10T Targets 10 x 10 mm (400 each)
210210010	RS15N Targets 15 x 15 mm (196 each) (SO)
210210013	RS15T Targets 15 x 15 mm (196 each) (SO)
210210018-SURSK	RS20N Reflective Sheet Target 20 x 20 mm (0.79 x 0.79 in.) (100/Sheet)
210210019	RS20T Targets 20 x 20 mm (100 each) (SO)
210210026	RS30N Targets 30 x 30 mm (49 each)
210210029	RS30T Targets 30 x 30 mm (49 each) (SO)
210210035-SURSK	RS50N Reflective Sheet Targets 50 x 50 mm (1.96 x 1.96 in.) (16/sheet)
210210037-SURSK	RS70N Reflective Sheet Targets 70 x 70 mm (2.75 x 2.75 in.) (9/sheet)
210210040	RS90N-K Targets 90 x 90 mm (4 each) (SO)
210210041-SURSK	RS90N Reflective Sheet Targets 90 x 90 mm (3.54 x 3.54 in.) (4/sheet)



Reflective Sheet Targets

Easy-to-use reflective targets supplied on adhesive-backed sheets; can be directly affixed to measuring points. For alternative needs, rotary targets and a 2-point target are also available.


210210046	RT50M Magnetic Target
634412	RT90M Rotary Target (SO)
210210045	RT50G10 Rotary Target (SO)
210210049	RT90G10 Rotary Target (SO)
210210002	RC50 Reflective Target 73 x 73 mm (SO)



Detachable Rotary Targets

The RT90C can be mounted on a tribrach with the AP41 adapter or mounted directly to prism pole.

210160170	RT90C 360° Rotating Sheet Target
210100170	I KI JOC JOO ROLULING JINCOL TUNGCL



Robotic Prisms

These robotic prisms are built to an offset of 87mm and prism constant of -7mm. Threading is 5/8x11 and can be used with Sokkia or Topcon robotic poles. The prism can also be used with Sokkia SB179 quick release adapter system.

1004684-01-SURSK Builder Series 360° Prism



Single Prisms

These prisms are compatible with the Builder Series Standard Prism Systems. 62 mm Prism Plastic Canisters are available in two styles and colors:

724801	Prism 62 mm Silver Coated Water Sealed
724802	Economy Prism 62 mm Silver Coated
724813	Economy Prism 62 mm Copper Coated



Rear Locking Builder Series 6 x 9

This prism assembly allows the user to quickly adjust the tilting target from behind the prism as it is pointing at the instrument to allow accurate sighting. The targets are 6 x 9 in. and available in either florescent orange or yellow. The prism can be either mounted in a 0 or -30 mm offset position. All come with a protective carry case for the target or complete system.

724809	Tilting Prism Mount with 6 x 9 in. Target Florescent Orange
724810	Tilting Prism Mount with 6 x 9 in. Target Florescent Yellow
These complete prism systems come with a 62 mm copper-coated prism in a sealed canister.	
724811	Tilting Prism Assembly with 6 x 9 in. Target, Florescent Orange (Copper Coated Prism)
724812	Tilting Prism Assembly with 6 x 9 in. Target, Florescent Yellow (Copper Coated Prism)



Prisms

Rear Locking Builder Series – 51/2 x 7

This prism assembly allows the user to quickly adjust the tilting target from behind the prism as it is pointing to the instrument to allow accurate sighting. The targets are $5^{1/2} \times 7$ in. and are available in either florescent orange or yellow. The prism can be either mounted in a 0 or -30 mm offset position. All come with a protective carry case for the target or complete system.

724804	Economy Single Tilting Prism Mount with $5^{1/2} \times 7$ in. Target Florescent Orange
724805	Economy Single Tilting Prism Mount with $5^{1/2} \times 7$ in. Target Florescent Yellow
The complete prism systems come with a 62 mm silver-coated prism in a sealed canister. Both come in a protective carry case.	
60857-SURSK	Economy Tilting Prism Assembly with $5^{1/2} \times 7$ in. Target, Florescent Orange
724808	Economy Tilting Prism Assembly with $5^{1/2} \times 7$ in. Target, Florescent Yellow



Strobe Prism Assembly

62 mm Strobe Prism Assembly with a $5^{1/2}$ x 7 in. or 6 x 9 in. florescent orange target. The prism can be either mounted in a 0 or -30 mm offset position. It works perfectly in low light conditions and all the electronics are housed in the prism canister. The battery is a Sanyo CR-1/3N; good for over 20 hours of use. Comes with a protective carry case for the target or complete system.

724100	Strobe Prism Assembly with 5½ x 7 in. Target
724101	Strobe Prism Assembly with 6 x 9 in. Target



Builder Series Mini Prisms

These robotic prisms are built to a prism constant of -7mm. Threading is 5/8x11 and can be used with Sokkia or Topcon robotic poles. The prism can also be used seamlessly with Sokkia SB179A quick release adapter system. Which comes standard with RC-PR5A kits.

724861	Mini Prism System with Non-Adjustable Center Vial
724862	Mini Prism System with Non-Adjustable Side Vial



Specialty Prisms

Pin Pole with Sliding 25 mm Prism System

System includes a 25 mm silver coated prism, three 60 cm length pole sections – in red and white 10 cm stripes (total length is 1.8 m/5.9 ft.). The prism can be mounted in a 0 mm offset position. The kit also comes with a padded carrying case and a plumb bob hook, and cap for prism to use as an offset prism by itself.

724870

Mini Prism System Kit with Pin Pole



GT/IX Traverse Kit

Complete heavy duty traverse kit for use with GT or IX robotic total stations.

644731012

GT/IX Traverse Tilting 1P Setup with Plug4

Kit includes TR-101 Tribrach, AP41 Adapter, AP01-AR Kit, Carrying case. This is for 'leap frog' traverse method in which tribrachs may be left in place. Configured for Sokkia iX robotic instrument. May be used with other instruments, but please check for proper height measurement.



Monitoring Prism

25 mm specialty prism that can be mounted to a range of different surfaces and used in many different environments.

724814

90° L-Bar Monitoring Prism



Builder Series Prism Poles

Compression/Collet Lock Prism Poles

The Sokkia compression lock prism pole offers a secure locking system with a polished aluminum pole with a brass lock. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case.

51780-SURSK	8.5 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations)
724207	12 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations)
724208	15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations)

Sokkia Knob-Lock Prism Poles

The Sokkia knob-lock prism pole is easy to tighten and release with its large adjustable knob. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case.

724200	8.5 ft. Knob Lock Prism Pole – Comes with holes for locking your height setting and Adjustable Tip (Dual Graduations)
724201	12 ft. Knob Lock Prism Pole – Adjustable Tip (Dual Graduations)
724202	15 ft. Knob Lock Prism Pole – Adjustable Tip (Dual Graduations)

Sokkia Quick-Release Prism Poles

The Sokkia quick-release handle lock prism pole allows for quick adjustments to prism heights. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case.

51773-SURSK	8.5 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)
724204	12 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)
724205	15 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)



Prism Pole Bipods and Tripods

Builder Series Bipod and Tripod

Builder series bipod and tripod assembly is designed for quick setup and field durability. These models are come with a carrying case to protect them. The bipods also have a bipod leg clip included as well.

724897	Economy Prism Pole Bipod Red
724898	Economy Mini Prism Pole Bipod Red
1009273-01	Carbon Fiber Prism Pole Bipod (Sokkia)

Prism Pole Accessories

808850	Universal Replacement Point (Prism Pole, Bipod and Range Pole)
808851	Topographic Shoe Regular
808852	Topographic Shoe Wide Base
808853	5/8 x 11 Adjustable Precise Tip - Fine (Compatible with Pro Series and Robotic Poles)

Mini Stake-Out Poles

Available in Economy or Pro-Series. Measures 15 in. (1.29 ft.) with point (1 ft. rod section).

724242	Economy Mini Stake-Out Pole Red with Carrying Bag
808043	5.1 ft. / 2.7 m Pro Series Aluminum Knob Lock Mini Pole

Data Collector Brackets

Pro Series Crush Proof 1.25 in. Pole Claw Clamp with Pro Series Cradle

- Crush proof style pole clamp and cradle with a push button quick release
- 1.25 in. pole clamp capacity
- 20 different angles snap-in adjustment with 2 hardened stainless steel lock pins
- Anti-slip diamond knurled lock knobs
- · Constructed of aircraft grade 6061-T6 billet aluminum
- · Black anodize finish with high tech laser engraving
- Made in the USA

808152	Claw Clamp and Cradle for Allegro/Explorer
808153	Claw Clamp and Cradle for Archer/MINI
808154	Claw Clamp and Cradle for SHC25/SHC25A
808155	Claw Clamp and Cradle for SHC2500
808156	Claw Clamp and Cradle for SHC250
808158	Claw Clamp and Cradle for SHC236/336
808160	Pole Clamp, Quick Release with Vial and Compass
808161	Pole Clamp, Quick Release Plain
1000183-01-SURSK	4 Screw Pole Mount Bracket for Mesa
1015317-01-SURSK	FC/SHC5000 RAM CLIP mount Kit
1004111-01	BRACKET, FC-500 DATA CONTROLLER









PRO Series Prism Poles

Pro Series Knob Lock Prism Poles Data Collector Brackets

- One hand operation
- Slip resistant molded rubber knob
- Precision CNC marked graduations won't fade or rub off
- Heavy duty aluminum construction with electrostatic epoxy powder coat finish
- 40 minute top-adjust vial bubble level Fine threaded precise tip allows for precision height adjustment
- Stainless steel tip points, ultra light weight corrosion resistant hybrid design
- Available in red/white bands
- Lightweight

808200	8.5 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808201	12 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808202	15 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808204	3.6 m Pro Series Aluminum Knob Lock Prism Pole, Metric



Pro Series Bipods and Tripod

- Original quick snap bipod and tripod assembly with dual push button thumb release or rapid level adjustment
- Quick Closure Pole Lock Mechanism allows fast attachments
- Accepts pole diameters of 0.75 to 1.5 in. [19 38 mm]
- Quickly and effortlessly convert to a tripod by adding an optional third leg
- Simple few additional twist of lock knob to secure pole to bipod
- Wide stance pivot tang to improve stability by distributing center
 of mass.
- All metal CNC construction
- · Stainless steel lightweight points included
- Manufactured from aircraft grade 6061-T6 billet anodized aluminum, stainless steel and brass

808895	Additional Leg for 808897
808897	Pro Series Prism Pole Thumb Release Bipod – Red



Specialty Poles

Robotic Pole

The Sokkia robotic pole features all of the benefits of the "Pro Series" line of product. The inner pole is aluminum while the outer pole is carbon fiber. The pole has external graduations for quick grading. 727071 is the standard Robotic Prism Pole sold with the SX and IX systems. The pole has a knob lock mechanism and locking pin holes every .5 feet.

727071	Sokkia robotic carbon/aluminum 8ft RCPR5



GPS Poles

The Sokkia GPS pole lineup features a wide variety of styles. Choose from adjustable height to 2 m fixed height. Also available is a pole with anti-crush feature, so your data collector clamp will not compromise the pole. The 808016 is the pole that comes with GRX3 and GCX3 systems standard.

808015	2.5m GPS Carbon Fiber Pole, Dual Grads
808016	POLE, CARBON, FIXED 2M, 2 SECT, SOKKIA
808017	Sokkia Snap-Lock GPS Carb Fbr Rover Rod
724290	2 m Economy GPS Aluminum Rover Rod, 2 Section – Sokkia Green with carrying case
724291	2 m Economy GPS Carbon Fiber Rover Rod, 2 Section with carrying case



Heavy-Duty Range Poles

Alternating 12 in. color sections orange and white.

808849	4 ft. Range Pole Section
808848	8 ft. Range Pole 2 Sections with Point
808847	12 ft. Range Pole 3 Sections with Point



Pole Peg Adjusting Jig

This simple bracket allows you to adjust and calibrate pole vials in your office. The adjusting jig features a simple L-bracket to set the pole point into and a knob adjusting top to center the pole vial prior to adjusting the bubble.

724301	Pole Peg Adjusting Jig



Fiberglass Rods

Sokkia SK Level Rod

- Unique patented oval shape permits equal size graduations fulllength, prevents rod from rolling and is easier to hold
- Numerals and graduations are epoxy-protected for maximum wear-resistance and sized for maximum readability
- Sections cushioned with glides to prevent wear
- Linear accuracy exceeds 1 in 4,000
- Made from strong, corrosion-proof fiberglass that is lightweight and won't warp or swell
- Rods have height measuring gauge on back side except for 807368 or 807349
- Female threaded hole (5/8 x 11 in.) on top for mini-prism
- Made from non-conductive materials

807344	18 ft. SK Rod, 5 sections, ft./10ths
807338	25 ft. SK Rod, 7 sections, ft./in.
807348-SURSK	25 ft. SK Rod, 7 sections, ft./10ths
807368	25 ft. / 7 m in length, 7 sections, meters/ decimeters / ^{1/2} centimeters and ft./10ths/100ths
807349	32 ft. in length, 9 sections, ft./10ths/100ths with attached footplate

Nedo® Fiberglass Levelling Rods

- Extremely robust design with Anti-Jam® buttons made of brass ensure a long life
- · High precision scale on front and back
- Scale on back allowing for overall height readings
- Ergonomically designed shape for a better grip
- Non-conductive under dry conditions
- · Laser receiver brackets are easily attached
- Free carrying bag and snap-on rod level included
- · Made in Germany

809109	3 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm
809102	13 ft. Fiberglass Leveling Rod, 3 sections, ft./10ths/100ths
809106	13 ft. Fiberglass Leveling Rod, 3 sections, ft./in./8th
809110	4 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm
809103	16 ft. Fiberglass Leveling Rod, 3 sections, ft./10ths/100ths
809107	16 ft. Fiberglass Leveling Rod, 3 sections, ft./in./8th
809111	5 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm
809104	25 ft. Fiberglass Leveling Rod, 3 sections, ft./10ths/100ths
809112	7.6 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm



)

809104

Fiberglass Rods

SDL Digital Level Rods

Sokkia's RAB-Code (RAndom Bidirectional Code) staffs are designed exclusively for use with Sokkia Digital Levels. Staffs are available in Invar, fiberglass and aluminum in various lengths.

738037	BIS30A New Super Invar RAB-code Staff (SO)
210154100	BIS20 2 m Invar Staff Set for SDL30 (Two Rods with Case) (SO)
210154200	BIS20 3 m Invar Staff Set for SDL30 (Two Rods with Case) (SO)
210154300	BGS30 4 m Barcode Staff with Case (metric grads on back)
210154400	BGS40 4 m Barcode Staff with Case (metric grads on back)
210154500	BGS50 5 m Barcode Staff with Case (metric grads on back)
210154510	BGS50G3 16 ft. Barcode Staff with Case (ft./10th on back)
210160222	BSS60 60 cm Steel Barcode Section with Case (SO)
210164300	BAS55 Aluminum Barcode Staff 5 m with Case
210150031	GS20L Circular Level for BGS Rod, 20 in.
210150032	GS60L Circular Level for BGS Rod, 60 in./2 mm with Case
809601	Base Plate (Turtle)



Specialty Rods

Builder Series Level Rods

Fiberglass Rods

1005149-01	13 ft. Builder Fiberglass Rod, inches
1005150-01	13 ft. Builder Fiberglass Rod, tenths
1005151-01	16 ft. Builder Fiberglass Rod, inches
1005152-01	16 ft. Builder Fiberglass Rod, tenths
1005153-01	20 ft. Builder Fiberglass Rod, inches
1005154-01	20 ft. Builder Fiberglass Rod, tenths
1005155-01	25 ft. Builder Fiberglass Rod, inches
1005156-01	25 ft. Builder Fiberglass Rod, tenths
Aluminum Rods	

1005157-01	13 ft. Builder Aluminum Rod, inches
1005158-01	13 ft. Builder Aluminum Rod, tenths
1005159-01	16 ft. Builder Aluminum Rod, inches
1005160-01	16 ft. Builder Aluminum Rod, tenths
1027377-01	ROD, 5M BUILDER ALUMINUM E, MM
1027378-01	ROD, 5M BUILDER ALUMINUM E. INCHES
1024016-01	Button Kit R7-1701

Direct Elevation Rods

- Made of high strength clear anodized aluminum for lightweight, rugged, dependable operation
- They will not rust, split, splinter, swell or warp in any environment
- · Heavy duty, High Visibility tape
- Solid tape lock with internal brake slide

807650	GR10T Direct Elevation Rod, ft./10ths, 10ft
807651	GR10I Direct Elevation Rod, ft/in (SO)
807652	GR10M Direct Elevation Rod 3m (SO)
807653	Replacement Tape 10 ft., 10ths (SO)
1001605-01	GR1000, Rod, 10ft Laser Rod 10ths plus cut/fill
1001607-01	GR1450T, Rod 15ft Laser Rod 10ths
1001991-01	GR1000T, Direct Reading Rod 10ft 10ths with receiver guide
1030678-01	BKT, LS-80L, Laserline B1-LS70-80
1030679-01	BKT, LS-100D, Laserline B1-LA

Sokkia/SK Measuring Poles


- Exact measurements of up to 26 ft. or 8 m can be read on the enclosed, sealed digital readout
- · Rugged fiberglass construction with excellent tensile strength
- Smooth telescoping movement with friction clamps
- Only 4 ft. 8 in. closed and less than 5 lbs.
- Linear accuracy exceeds 1 in 2,000

807376	Graduated in ft./in./8ths
807386	Graduated in ft./10ths/100ths
807396	Graduated in m/dm/cm/mm

Rod Level

Determines if the level rod is perpendicular. Head is adjustable so that a true level can be maintained.

724190	Rod Level









SK Rod Replacement Pole Sections

18 FT. SK Level Rod ft./Inch with Case

807334	18 ft. SK SK Level Rod Sections
8073-341	SK205, 18 ft., inches, bottom 0-4
8073-342	SK205, 18 ft., inches, second 4.7.5
8073-343	SK205, 18 ft., inches, third 7.5-11
8073-344	SK205, 18 ft., inches, fourth 11.14.5
8073-345	SK205, 18 ft., inches, fifth 14.5-18

18 FT. SK Level Rod ft./Inch with Case

807344	18 ft. SK Level Rod ft./10ths with Case
8073-441	SK205, 18 ft., tenths, bottom 0-4
8073-442	SK205, 18 ft., tenths, second 4-7.5
8073-443	SK205, 18 ft., tenths, third 7.5-11
8073-444	SK205, 18 ft., tenths, fourth 11-14.5
8073-445	SK205, 18 ft., tenths, fifth 14.5-18

25 FT. SK Level Rod ft./Inch with Case

807338	25 ft. SK Rod, ft./inch with Case
8073-381	SK205, 25 ft., inches, bottom 0-4
8073-382	SK205, 25 ft., inches, second 4-7.5
8073-383	SK205, 25 ft., inches, third 7.5-11
8073-384	SK205, 25 ft., inches, fourth 11-14.5
8073-385	SK205, 25 ft., inches, fifth 14.5-18
8073-387	SK205, 25 ft., inches, sixth 18-21.5

25 FT. SK Level Rod ft./10ths with Case

807348	25 ft. SK Rod, ft./10ths with Case
8073-481	SK205, 25 ft., tenths, bottom 0-4
8073-482	SK205, 25 ft., tenths, second 4-7.5
8073-483	SK205, 25 ft., tenths, third 7.5-11
8073-484	SK205, 25 ft., tenths, fourth 11-14.5
8073-485	SK205, 25 ft., tenths, fifth 14.5-18
8073-487	SK205, 25 ft., tenths, sixth 18-21.5

25 FT. SK Level Rod ft./10ths with Case

807368	25 ft. SK Rod, 10ths/metric with Case
8073-681	SK205, 25 ft., tenths/metric, bottom 0-4
8073-682	SK205, 25 ft., tenths/metric, second 4-7.5
8073-683	SK205, 25 ft., tenths/metric, third 7.5-11
8073-684	SK205, 25 ft., tenths/metric, fourth 11-14.5
8073-685	SK205, 25 ft., tenths/metric, fifth 14.5-18
8073-686	SK205, 25 ft., tenths/metric, sixth 18-21.5
8073-687	SK205, 25 ft., tenths/metric, seventh 21.5-25

Planimeters

32 FT. SK Level Rod ft./10ths with Case

807349	32 ft. SK Level Rod ft./10ths with Case
8073-491	SK205, 32 ft., tenths, bottom 0-4
8073-492	SK205, 32 ft., tenths, second 4-7.5
8073-493	SK205, 32 ft., tenths, third 7.5-11
8073-494	SK205, 32 ft., tenths, fourth 11-14.5
8073-495	SK205, 32 ft., tenths, fifth 14.5-18
8073-496	SK205, 32 ft., tenths, sixth 18-21.5
8073-497	SK205, 32 ft., tenths, seventh 21.5-25
8073-498	SK205, 32 ft., tenths, eighth 25-28.5
8073-499	SK205, 32 ft., tenths, ninth 28.5-32



Planimeters

365151	Planix 5 Electronic Polar Compensator Planimeter
365161	Planix 6 Electronic Compensator Roller Planimeter
365170	Planix 7 Electronic Compensator Roller Planimeter
365110	Planix 10S Marble Digitizing Area Line Meter



Hand Levels

Hand Level - 1x

Fixed eyepiece; internally mounted bubble assembly and adjustable reflector. Six inches in length with durable finish.

804350	1x Hand Level with Bubble Inside
804908	Replacement Case



Magnifying Hand Level - 5x

Provides accuracy at greater distances. Objective lens and eyepiece slide for easy focusing. Stadia lines with 1:100 ratio. Length of $7^{1/2}$ in. Padded belt loop case included.

804260	5x Magnifying Stadia Hand Level
804907	Replacement Case



Square-Type Hand Level – 1x

Fixed eyepiece; internally mounted bubble assembly and adjustable reflector. 6 inches in length with durable finish.

804520	Square-Type Hand Level
804912	Replacement Case



Abney Levels

Magnifying Abney Level with Stadia - 5x

Percent scale in both directions easy-slide focusing motions for objective and eyepiece. 1:100 stadia. Enamel finished $7^{3/4}$ in. barrel extends to $8^{5/8}$ in. Measure existing grades with the 1 x $3^{3/4}$ in. flat base. Padded belt-loopcase included.

804755	Magnifying Abney Level with Stadia
804911	Replacement Case



Abney Level with Clinometer

Tube is $5^{1/8}$ in. long. Radius arc of $1^{1/8}$ in. graduated in degrees (0-90°) in both directions; vernier reading of 10 minutes. Slope scale 1:1 and 1:10. Padded belt-loop case included.

804710	5" Arc, Degree and Slope Abney Level
804715	5" Arc, Percent and Degree Abney Level
804905	Replacement Case



Topographic Abney Level

Two interchangeable arcs offer chainage correction, degrees (0–60°) in both directions and percent of grade. Index has friction movement for fine adjustment. Non-glare 6^{3} /8 in. aluminum level tube extends to 7^{3} /8 in. Padded belt-loop case included.

804745	63/8 in. Top with Two Arcs Abney Level
804907	Replacement Case



Double Right Angle Prism

Two prisms allow for sight to the right and left. Clear optical glass for straight ahead viewing. Metal construction. Includes leather case.

	724780	Double Right Angle Prism
--	--------	--------------------------



Tripods

Professional Tripods

Sokkia professional tripods are produced using birch wood and fiberglass construction. They feature a 5/8"x11 universal screw for instrument mount and either a quick clamp (QC) or twist locking mechanism to lock the legs. They feature hardened steel points, and also include a heavy duty carrying strap.

724445	Aluminum Tripod Light Weight Quick Clamp	
	Height: 34" min / 63" max / 30" closed	⁵ /8 x 11 Head
724645	Aluminum Tripod Medium Weight Quick Clamp	
	Height: 38" min / 63" max / 42" closed	⁵ /8 x 11 Head
724675	Aluminum Tripod Medium Weight Twist Lock	
	Height: 42" min / 70" max / 45" closed	⁵ /8 x 11 Head
724251	Fiberglass Tripod with Dual Clamp	
	Height: 42" min / 70" max / 45" closed	⁵ /8 x 11 Head
724252	Wood Tripod Dual Clamp with Tool Kit	
	Height: 42" min / 70" max / 45" closed	⁵ /8 x 11 Head
724281	Wood Fiberglass Tripod Twist Lock	
	Height: 38" min / 63" max / 42" closed	⁵ /8 x 11 Head
724282	Wood Fiberglass Tripod Quick Clamp	
	Height: 38" min / 63" max / 42" closed	⁵ /8 x 11 Head



Heavy Duty aluminum tripod

The Sokkia Heavy Duty Aluminum tripod features high grade aluminum construction with a square leg design. Weight is only 10lbs, which makes it perfect for using with rotating lasers or theodolites. The tripod features a quick clamp (QC) leg locking mechanism. Also includes a heavy duty carrying strap.

1030651-01	Tripod, Square Leg Aluminum QC, SOKKIA	
	Height: 36" min / 60" max / 41" closed	Standard Head



Tripods

Professional Robotic Tripod

- · Round, oversized tripod head
- · Quick clamp for easy adjustments
- · Heavy duty strap
- Inner locking strap for tripod stabilization
- · Wood, fiberglass construction

1030560-01	Tripods, SK-15 Wood Fiberglass QC
	Height: 38" min / 63" max / 42" closed

Sokkia Wide-Frame Aluminum Tripod

Anodized finish in high-visibility International orange and silver with sling strap for easy hand or shoulder carrying. Extra-long shoes with large spurs for greater anchoring power. Hardened steel with a screw-clamp leg assembly.

1005306-01	PFA2 Aluminum Tripod, Flat	
	Height: 67" max / 41" closed Weight: 8.6 lbs.	5/8 x 11 Flat Head

Elevating Tripod

- Robust aluminum top plate with 5/8 x 11
- Double telescope for a large working range
- Anodized scale
- · Robust crank mechanism for easy handling
- Built-in bubble for easy setup
- · Slip-Guard to prevent the legs from spreading unintentionally
- Break-proof aluminum quick release levers

809550	Medium Duty Elevating Tripod		
	Height: 44" min / 93" max / 48" closed	Weight: 12 lbs.	
809551	Heavy Duty Elevating Tripod		
	Height: 34" min / 112" max / 44" closed	Weight: 15 lbs.	
60810-SURSK	Extra Heavy Duty Elevating Tripod		
	Height: 33" min / 119" max / 52" closed	Weight: 19 lbs.	
60811-SURSK	Extra Heavy Duty GIANT Elevating Tripod		
	Height: 70" min / 157" max / 77" closed	Weight: 25lbs	

Tripod Stabilizer

Designed to provide stability when working indoors on concrete and other hard surfaces. Made of heavy-duty aluminum and collapses for compact storage. Comes with rubber O-rings that fit over the feet of the tripod for extra security.

808903	Tripod Stabilizer
808903	i iribou Stabilizer










Builder Series Tripod Parts


Tripod Parts - Aluminum Builder Series (724645, 724445)

•	•
724445-29	724445 Strap assembly (Illustration 29)
724445-30	724445-30 724445 Quick release assembly (Illustration 21-28)
724445-31	724445 Leg assembly (Illustration 9-15)
724445-32	724445 Tripod head assembly (Illustration 1-8)
724445-33	724445 Tripod foot assembly (Illustration 16-20)
724645-2	Tripod head
724645-22	Tripod shoe #22
724645-23	Tripod shoe nail
724645-29	Clamp lever rf 724645-45 assembly
724645-3	Centering guide #3
724645-32	724645 Strap assembly (Illustration 32)
724645-4	Centering bolt #4
724645-45	724645 Quick release assembly (Illustration 24-31)
724645-46	724645 Leg assembly (Illustration 9-18)
724645-48	724645 Tripod head assembly (Illustration 1-8, 33)
724645-50	724645 Tripod foot assembly (Illustration 19-23)
724645-HINGE	Hinge bracket

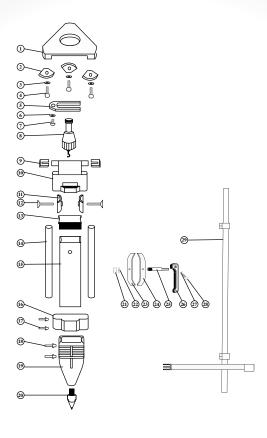

Tripod Parts - Fiberglass (724251, 724252)


724251-10	Hinge bracket		
724251-22	Leg dowel cap		
724251-25	Nut		
724251-36	Clamp shaft		
724251-38	E ring		
724251-39	Lever axis		
724251-9	Hinge bushing		
724252-22	Clamp band		
724252-24	Tripod shoe nail		
724252-25	Tripod shoe		
724252-36	724252 Strap assembly (Illustration 36)		
724252-37	724252 Quick release assembly (Illustration 37-1 - 37-8)		
724252-46	724252 Leg assembly (Illustration 8-21, 30-32)		
724252-48	724252 Tripod head assembly (Illustration 1-7, 33-35)		
724252-50	724252 Tripod foot assembly (Illustration 22-29)		
724252-8	Hinge bushing		
724252-9	Hinge bracket		
724252-CLAMP	Complete quick clamp assembly		

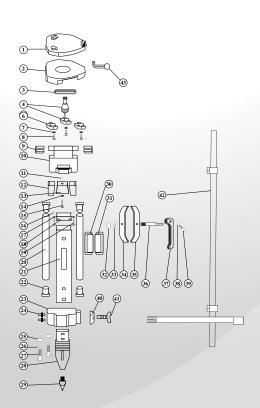

Builder Series Tripod Parts

Tripod Parts - Wood Fiberglass (724281, 724282)

724282-38	Strap assembly (Illustration 38)
724282-45	Quick release assembly (Illustration 30-37)
724282-46	Leg assembly (Illustration 10-22, 24, 29, 39, 41)
724282-47	Leg assembly with handle (Illustration 10-21, 24, 29, 39, 40, 41)
724282-48	Tripod head assembly (Illustration 1-9)
724282-50	Tripod foot assembly (Illustration 23, 25-28)

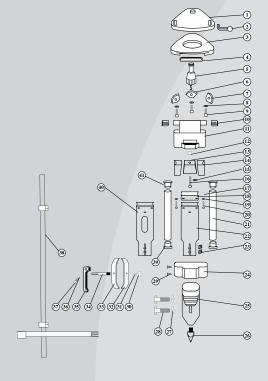

Vertical Construction Column Clamp

1003884-01	Column Clamp Mount
1003885-01	1-man Installation Kit for Column Clamp



Tribrachs and Adapters

Precision Tribrachs

Tribrachs accept Sokkia EDM systems, electronic and optical theodolites, as well as equipment and accessories. Base plate has standard 5/8 x 11 threads and circular level vial with a sensitivity of 10 min./2 mm twist focus knob.

307486007-SURSK	TR-102 For manual TS and GPS
307796006-SURSK	TR-111 For motorized TS with optical plummet
307796007-SURSK	TR-112 For manual TS with optical plummet
307486006-SURSK	TR-101 For motorized TS without optical plummet



307796007-SURSK

Laser Tribrach

Bright focused laser dot provides accurate and quick positioning over a point. Push button on/off switch with standard 8 minute circular vial. Includes standard 3 volt CR2 lithium battery.

724034	Tribrach with Laser Plummet, Black





Builder Series Tribrachs

22-006008-01-SURSK	Tribrach with Optical Plummet, Black
724036	Tribrach without Plummet, B lack

Tribrachs Adapters

Adapter accepts all mount and target assemblies; has 60 second level vial for accurate leveling and centering that's adjustable to match height of optical axis above the tribrach.

Mounting adaptor for C 5/8 x 11 center stud.	GPS, prisms and target systems with most tribrachs –		
22-006009-01-GPSSK	Tribrach Adapter Fixed		
	d target systems to most tribrachs – has removable 1 threads and locking screw. Removable center ment separately.		
51842-SURSK	Tribrach Adapter with removable center		
Includes ^{5/8} x 11 male to Threaded portion attac edge and friction stop.	hread for attaching GPS, prisms and target systems. ched to rotating plate for easy aiming. Plate has knurled		
724042	Tribrach Adapter friction rotatable		
210160016-GPSSK	AP41 Optical plummet adapter with vial and adjustable height		





Stereoscopes

MS27

The MS27 offers unmatched precision and ease of use for viewing and interpreting aerial photographs. The distance between the stereo pairs is 27 cm, and the field of view is a generous 18 x 23 cm. TRA2 tracking device (option) allows for accurate stereoscopic observation over entire overlapped portions of photographs. Illumination unit LA3 is provided as an optional accessory.

MS27 Specification	MS27 Specifications		
MAIN UNIT			
Distance of optical path		27 cm	
Magnification		Swing-in Magnifier: 1.8x BN3 Binocular: 3x, BN8A Binocular: 8x	
Field of view of stereo	oscope	18 x 23 cm	
Field of view of binoc	ular	BN3: 70 mm, BN8A: 27 mm	
Range of eye-span		55 to 75 mm	
Weight		4.0 kg (8.8 lbs.)	
PB1 PARALLAX MEAS	URING	BAR	
Minimum graduation / esti- mation		0.05 mm / 0.01 mm	
Measurement range		0 to 50 mm	
Length / weight		39.5 cm / 0.5 kg (1.1 lbs.)	
TRA2 TRACKING DEVICE (opt		tional)*	
Size of photographs		Up to 45 x 45 cm	
Range of displacement		Latitudinal: 550 mm / Longitudinal: 450 mm	
*The TRA2 cannot be used with the LA3 Illumination Unit.			
2101531A0	MS27 Stereoscope Complete with BN3 and PB1		
210153100	MS27WO Stereoscope Main Unit in Case		
210153800	LA3 Illumination Unit		
210153700	BN3 3x Binoculars Only		
210153600	PB1 Stereometer only (Parallax Bar)		
210150087	TRA2 T-27 Track Attachment for MS27		
210153300	BN8A 8x Eyepiece Set Converts BN3 to BN8		



This small mirror stereoscope is compact yet practical with a 16 cm optical path which provides a wide field of view.

MS16 Specifications		
Distance of optical path		16 cm
Field of view		10 x 10 cm
Weight		4.0 kg (8.8 lbs.)
210153200	MS16 Small Mirror Stereoscope	

PS4A and **PS2A**


Handy lens-type stereoscopes. Distance between lenses is adjustable from 56 mm to 75 mm. Two magnifications available, 4x (PS4A) and 2x (PS2A).

210153400	PS2A Pocket Stereoscope (2x with Soft Case)	
210153500	PS4A Pocket Stereoscope (4x with Soft Case)	



2101531A0 with 210150087





Field Books

Field Books

Left page with blue horizontal lines and red vertical lines Right page with 4 squares per inch and red vertical line

815260 Field Book (4¹/₂ x 7¹/₄ in.)

Both pages with 10 squares per inch with inch lines slightly heavier

815275 Cross-Section Book (6¹/₂ x 8¹/₂ in.)

Both pages with blue horizontal lines and red vertical lines Six vertical columns per page

815250 Level Book (4 x 6¹/₂ in.)

Both pages with blue horizontal lines and red vertical lines Six vertical columns per page

815255 Level Book (4¹/₂ x 7¹/₄ in.)

Loose-Leaf Sheets: Single sheets: 50 singles per package, 12 packages per carton,

sold by the package

815350 Level Book Single Sheets (pkg 50)





Rite-In-The-Rain® Weatherproof Field Books

80 leaves, ruled 8 vertical lines per inch, covered in yellow poly. Size: 4⁵/₈ x 7 in.

815400 Transit Book #300

80 leaves, ruled 6 vertical columns per page, covered in yellow poly. Size: 4⁵/8 x 7 in.

815405 Level Book #310

Loose-Leaf Sheets - 100 loose-leaf sheets per...≠ packs

	015410	Transit Daral, Charter #202 (corred laws at an 015260)			
815410		Transit Book Sheets #302 (same layout as 815260)			
	815415	Level Book Sheets #312 (same layout as 815250)			





815400

815370



815410

High-Visibility Buckram Binders

Buckram-covered stiff board construction-lined with black paper Six-ring style

Six-ring style			
815370	50-page capacity binder with $^{1/2}$ in. rings.		
	Size: 5 ¹ / ₂ x 7 ³ / ₄ in.		
815375	100-page capacity binder with ³ / ₄ in. rings. Size: 5 ¹ / ₂ x 7 ³ / ₄ in.		

Field Books

Transit/Economy Field Books

Left page level ruled, right page with 8 vertical and 4 horizontal blue lines and red vertical center line

815200 Transit Field Book (4¹/₂ x 7¹/₄ in.)

Loose-Leaf Sheets: Single sheets: 50 singles per package, 12 packages per carton, sold by the package

815300 Transit Book Single Sheets (pkg 50)

Heavy paper cover, spiral bound and 36 pages

815205 Level Book (4 x 6¹/₂ in.)

Heavy paper cover, saddle stitched (stapled) and 32 pages

815210 Economy Field Book



Specialty Field Books

Left page level ruled, right page with 8 squares per inch and red vertical center line

815220 Mining Transit Book (4¹/₂ x 7¹/₄ in.)

Left page level ruled, right page with 10 squares per inch, red vertical center line and heavy inch lines

815230 Engineer's Field Book (4¹/₂ x 7¹/₄ in.)



High-Visibility Polyethylene Binders

One-piece, 55-gauge single-piece cover resists dirt and withstands tough weather Six-ring style

815378	100-page capacity with ³ / ₄ in. rings. Size: 5 ¹ / ₂ x 7 ³ / ₄ in.
815379	50-page capacity with ^{1/2} in. rings. Size: 5 ^{3/4} x 7 ^{3/4} in.



815378

Lufkin Measuring Tapes

Lufkin Tape Reel and Frame

- For 1/4 in. or 5/16 in. x 100 ft. lengths of steel tapes only
- · Nickel-plated reel, 2-arm with rollers in each arm for smooth winding
- · Oversize drum with long, one-piece winding handle, quick return of line

120150	31100	100 ft./30 m x ¹ / ₄ or ⁵ / ₁₆ in.	Figure 8, for chain-style tapes
120152-S	31-200	200 ft./50 m x ¹ / ₄ or ⁵ / ₁₆ in.	D-handle, point, for chain-style tapes
120153 (SO)	31-300	300 ft./100 m x ¹ / ₄ or ⁵ / ₁₆ in.	D-handle, point, for chain-style tapes



Lufkin Chain-Style Tapes - Super Hi Way Nubian® 5/16 in.

- · Nominal thickness .017 in.
- · Easy-to-read raised graduations
- · Lines have a blank space at each end
- Extra foot before zero graduated right to left to 10ths and 100ths
- Balance marked every foot except last foot of each 100 ft. length, 100ths
- · Reels required: 120150, 120152-S, 120153

122110	O9100B	1201-50, 31-100, 100 ft.	Add feet
122120	O9200B	1201-52, 31-200, 200 ft.	Add feet
122130 (SO)	O9300B	1201-53, 31-300, 300 ft.	Add feet



Chaining Pins

Set of 11 chaining pins with alternating red and white colors

724300	14 in	Chaining	Pins	(Set	of 1	1)



Lufkin Banner Tapes

Item No. Lufkin No.		Length and Width	Graduations	Color
120315-S (SO)	C216D	100 ft., ³ / ₈ in. wide blade (ring end)	ft./10ths/100ths	Chrome
120325-S	120325-S HC256		Inches	Chrome
120335-S (SO)	HW223D	50 ft.	ft./10ths/100ths	n/a
120345-S	HW226D	100 ft.	ft./10ths/100ths	n/a



Lufkin Architect's Pocket Scale

Yellow-clad 1 /4 in. x 5 ft. blade with black markings and automatic return. Scales: 1 /4 and 1 /8 in. to foot.

	120364-S	Architect's Pocket Scale Lufkin No.: W393
--	----------	---

Note on Graduation Styles

Add style feet:

Tapes have a blank space at each end. The extra foot before zero is graduated in 10ths and 100ths from right to left. Balance is marked every foot except the last foot of each 100 ft. length, which is in 100ths of feet.

Add style metric:

Tapes have a blank space at each end. The decimeter before zero is graduated in millimeters from right to left. Balance is marked every decimeter to meter.



Lufkin Measuring Tapes

Lufkin Peerless Yellow Clad Tapes

- Designed for engineers and surveyors who prefer a 4-arm reel
- Chrome Clad® and yellow clad blade
- 1/4 in./6 mm wide and .016 in. thick
- Subdivided line removes easily from reel
- Long, easy-action winding handle that locks line in any position
- · Nickel plated reel, 4-arm with rollers in each arm for smooth winding
- Open design construction aids in drying line and clearing out dirt
- Pair of 580 finger rings, a 579 engineers conversion rule are furnished
- · Reel available separately

Item No.	Lufkin No.	Refill No.	Lufkin Refill	Length/Width	Graduations
121615	Y1276D	121616	RY1276D	100 ft.	ft./10ths/100ths
121620	Y1278	121621	RY1278	200 ft.	ft./in./8ths
121625	Y1278D	121626	RY1278D	200 ft.	ft./10ths/100ths
121630	Y1279	121631	RY1279	300 ft.	ft./in./8ths
121635 (SO)	Y1279D	n/a	RY1279D	300 ft.	ft./10ths/100ths

Lufkin Ny-Clad Steel Tapes

- Durable nylon coating on blade resists wear under extreme conditions
- Super fast 3-to-1 blade retraction saves time in the field
- · Steel blade will not stretch under normal use
- Engineers' Scale 10ths and 100ths of feet

Item No.	Lufkin No.	Refill No.	Lufkin Refill	Length/Width	Graduations
125253	PS1806	n/a	n/a	100 ft.	ft./inches
125254	PS1806D	n/a	n/a	100 ft.	10ths/100ths
125255	PS1808	n/a	n/a	200 ft.	ft./inches
125256	PS1808	n/a	n/a	200 ft.	ft./10ths/100ths

Lufkin Folding Rules

- For measuring left to right, right to left
- Marked both sides
- Graduated in feet, inches and 1/16ths on both sides and both edges
- Flat inside markings lie close to the work

Item No.	Lufkin No.	Length	Graduations
120247-S	062CME	6 ft./2 m	ft./in./16ths ft. and metric
120566 (SO)	966	6 ft.	ft./in. and metric
120575	1066D	6 ft.	ft./10ths/100ths and ft./in./16ths ft., Heavy Duty
120576	1066DM	6 ft./2 m	ft./10ths/100ths/metric, Heavy Duty

Lufkin Fiberglass Open-Reel Tapes

- Lightweight open reel is easy to handle and rewind
- Hi-Viz® orange case
- Blade style: C1

Item No.	Lufkin No.	Length	Graduations
125244	1706D	100 ft.	10ths
125248	1706	100 ft.	inches
125251	HY1730CME	100 ft./30 m	ft./meters
125246	Lufkin No-FE200D	200 ft	10ths
125252	Lufkin No-FM030DM	200ft/30m	ft/meters









Lufkin Measuring Tapes

Lufkin Series 2000 in Chrome-Plated Cases

- · Case designed to fit perfectly in the hand
- Lightweight, high strength chrome finished case
- · Fits easily into most tape holsters
- Bright yellow blade has clear easy-to-read numerals
- · Toggle lock positioned for convenient operation, holds blade securely
- Cushioned blade return
- · Removable belt clip
- All shelf pack power tapes are carded

Item No.	Lufkin No.	Blade Length and Width	Graduations
120112-S	2312D	³ / ₄ in. x 12 ft.	ft./in./16ths and ft./10ths/100ths
120122-S	2325D	³ / ₄ in. x 25 ft.	ft./in./16ths and ft./10ths/100ths
120133	2133D	1 in. x 33 ft.	ft./in./16ths and ft./10ths/100ths



120112-S

Lufkin Series HV1000 in Blaze Orange Case

- Hi-Viz® case easy to find on the job
- · Lightweight, high strength case designed to fit perfectly in the hand
- Fits easily into most tape holsters
- Bright yellow blade has clear easy-to-read numerals
- Toggle lock positioned for convenient operation, holds blade securely in any position
- · Virtually unbreakable Quad Hook; four rivets for extra strength
- · Cushioned blade return
- Removable belt clip

Item No.	Lufkin No.	Blade Length and Width	Graduations
120113-S	HV1048DM	1 in. x 25 ft./7.5 m	ft./10ths/100ths/metric
120115-S	HV1048CM	25 mm x 8 m	metric
120121	HV1425ED	1 in. x 25 ft.	ft./10ths/100ths
120124-S	HY1034DM	³ / ₄ in. x 12 ft.	10ths/metric
120128	HV1425D	1 in. x 25 ft.	ft./in./16ths and ft./10ths/100ths
120134	HV1312D	³ / ₄ in. x 12 ft.	10ths
121915 (SO)	HV1048CME	1 in. x 26 ft./8 m	ft./in./8ths/metric
121916	HV1433DM	1 in. x 33 ft./10 m	ft./10ths/100ths/metric

Komelon Measuring Tapes with Belt Clips

Available in power tapes, fiberglass tapes or nylon coated steel tapes in many lengths and graduation styles. All cases and reels are sturdy Hi-Visibility green ABS plastic.

870625	1 in. x 25 ft. Power Tape	Graduations: in/10ths
1001599-01	1 in. x 33 ft. with nylon coated blade	Graduations: in/10ths

Sokkia/Eslon Fiberglass Utility Tapes (¼ in. wide)

Especially good for topographic surveys. Extremely light and slip- and tear-proof. (Not supplied with reel)

845022 Length: 50 m Graduations: 5 cr	n
---------------------------------------	---









Sokkia/Eslon™ Measuring Tapes

Sokkia/Eslon Fiberglass Open-Reel Tapes (1/2 in. wide)

Lightweight case is virtually shatterproof. The special handle design makes reeling quick. Width $^{1/2}$ in., with folding metal end hook.

Item No.	Refill No.	Length	
Printed on one side. Graduated in ft./in./8ths.			
845144	845164	100 ft.	
845146	n/a	200 ft.	
845148	n/a	300 ft.	

Printed on both sides. One side graduated in ft./in./8ths, other side m/cm/2 mm.		
845444	845464	100 ft./30 m
845445	n/a	165 ft./50 m

Printed on one side. Graduated in ft./10ths/100ths.		
845244	845264	100 ft.
845245	845265	165 ft.
845246	845266	200 ft.

Printed on both side	inted on both sides. One side graduated in ft./10ths/100ths, other side m/cm/2 mm.		
845542	n/a	50 ft./15 m	
845544	845564	100 ft./30 m	
OVEEVE	OVEECE	16E ft /E0 m	

	Printed on one side. Graduated in m/cm/2 mm.		
	845344	845364	30 m
	845346	n/a	60 m
	845348	845368	100 m





Sokkia/Eslon Fiberglass Appraiser's Tapes

These long-lasting tapes have special hook ends to assure accuracy.

Item No.	Refill No.	Length	
Printed on one side. Graduated in ft./in./8ths.			
845174	845174	100 ft.	
Printed on one side. Graduated in ft./10ths/100ths.			
845274	845284	100 ft.	



Sokkia/Eslon Warranty

Sokkia/Eslon tapes are covered by a 90 day warranty. If your Sokkia/Eslon tape breaks or if it is defective, Sokkia Corporation will replace it at no charge for up to 90 days from the original date of purchase. This warranty also covers defective or broken tape reels and cases. Details are supplied with tapes.



Compasses and Clinometers

Suunto Compass/Clinometers

Compasses

802442	51-MC-2D Mirror Compass 0-360°
Sighting	
802510	51-KB20/360R Compass 0-360°

Accessories

802503 51-K1335 Rubber Cover, Fits: 802530/802540/802575/802590 (SO)

Twin Precision Compasses/Clinometers

Two instruments in one. Built-in prismatic sighting for fast field use. Resists corrosion, water and impact. Use for directional indications and slope/height measurements with an accuracy of $\pm 0.25^{\circ}$.

802506	1380 Tandem	Compass/Clinometer

Clinometers

Use as a hand level, builder's level, optical plummet and slope indicator. Measures vertical angles, computes height, determines slope angles and levels for rough surveying. Liquid will not freeze or evaporate.

802575	51-PM5/360PC Clinometer
802590	51-PM5/66PC Height Meter with Slope Scale

802442





Ushikata Surveying Compass

Handy and compact. A unique "O-BAC" device for one-touch zero setting provides a horizontal reading. Quick magnetic readings with a magnetic induction damper and stadia survey is available with the telescope reticle. Perfect for mountain, forest and range surveying.

S-25 Specification	ns	
Telescope		Reversible, erect, 12x, 120 mm long
Horizontal Circle		5 ft., "O-BAC" zero setting
Compass Circle		Diameter 70 mm, 1°
Vertical Circle		Full circle, 1°
Weight		1.0 kg
802635	Surveying Compass with Telescope and Case, 0-360° Ushikata Tracon S-25	
802633	Aluminum Extension	Tripod with Case (Ushikata Model No. 33)



Thermometers

Thermometers

This magnet reset, mercury filled thermometer includes a tenite case. Range -40 $^{\circ}$ to 120 $^{\circ}$ F in 2 $^{\circ}$ increments. Non-refillable.

800600 Max.-Min. Thermometer

This $5^{1/2}$ in. long thermometer is mercury filled and has a range of -40° to $120^{\circ}F$ in 2° increments. Non-refillable.

800610 Pocket Thermometer

Read indoor and outdoor temperatures from inside with bold red and blue numerals. Extend tubing out window to read outdoor temperatures. Range: -45° to 115° F / -40° to 55° C.

800692 Indoor/Outdoor Thermometer (SO)



As accurate as mercury thermometers, but without the need for safety precautions to avoid potential toxicity. Measures temperature with a bi-metallic coil attached to an indicator needle.

800651	1 in. dial; -40° to 50°C (SO)
800660	1 in. dial; 0° to 220°F
800672	2 in. dial; 0° to 550°F
800601	1 ³ / ₄ in, dial: 50° to 550°F









Pocket Digital Thermometer

High precision pocket digital thermometer. Can be calibrated. Maximum/minimum temperature feature retains memory even when turned off. Two-stage off button with timer, auto-off feature to conserve battery, replaceable watch battery installed. $4^{1}\!\!/_{\!2}$ in. stainless steel stem. Range: -58° to 500°F / -50° to 260°C.

800690 Pocket Digital Thermometer



Bags and Carrying Cases

Stake Bags

Sokkia Heavy-Duty Stake Bag made from durable orange material and made to carry 18 in. or 24 in. stakes. These bags are made with a drain hole and an adjustable carrying strap.

801055	Heavy-Duty Stake Bag 18 in.
801056	Heavy-Duty Stake Bag 24 in.

Lath Bags

Sokkia Heavy-Duty Lath Bag made from durable orange material and made to carry 36 in. or 48 in. lath. These bags have an adjustable carrying strap.

801065	Heavy-Duty Lath Bag 36 in.
801066	Heavy-Duty Lath Bag 48 in.

Carry-All Case

Sokkia Heavy-Duty Carry all bag will allow you to carry a full size wood tripod and also include an 8 ft. prism pole.

801080	Heavy-Duty Accessory Carry-All Case - 58 x 9 ¹ / ₄ in. (l x d)
--------	--

Prism Bags

Sokkia Heavy-Duty Prism bags that are padded with thick dense foam and the exterior is made from durable orange material.

801070	Heavy-Duty Single Prism Bag, Interior Dimensions - 12 x 10 x 4 in. (w x l x d)
801071	Heavy-Duty Prism System Bag, Interior Dimensions

Data Collector Cases

Sokkia Data Collector Carrying Cases

804903	Universal Data Collector Case
1026489-01-SURSK	Hard Carrying Case For FC-5000
1026490-01-SURSK	Soft Carrying Case For FC-5000

Instrument Hardcases

1026194-01	CASE, HARD IX W/FUSION
1026192-01-SURSK	SURSK CASE, HARD GT W/FC-5000 AND RC-5 H/P









1026489-01-SURSK

Flagging

Presco "Texas" Flagging

Colorfast and rainproof. Contains no toxic lead. Packed one dozen to a box; sold by the box. Size: 1 in. wide. Note: Colors cannot be assorted within the box.

8110	Solid 300 ft. roll. Specify color with last two digits: -00 Red, -01 Orange, -02 Blue, -03 Yellow, -04 White, -06 Black, -11 Green.
8112	Florescent 150 ft. roll. Specify color with last two digits: -00 Red Glo, -01 Orange Glo, -03 Yellow Glo, -04 Pink Glo, -06 Lime Glo

Presco "Arctic" Flagging

Excellent durability, performance, and temperature resistance down to -40°F. Packed one dozen to a box; sold by the box. 3 mm for standard colors, 5 mm for florescent colors. Note: Colors cannot be assorted within the box.

	Florescent 150 ft. roll. Specify color with last two digits: -69 Yellow Glo, -70 Orange Glo, -71 Pink Glo, -72 Blue Glo, -73 Lime Glo.
8110	Solid 300 ft. roll. Specify color with last two digits: -77 White, -78 Blue.

Stake Flags

Vinyl flags securely attached to stiff steel wire stakes. Packed 100 to a bundle with 10 bundles per box. Sold by the box. Order in increments of 10.

8108	Small Flags ($2^{1/2}$ x $3^{1/2}$ in.) – 21 in. stakes. Specify color with last two digits: -00 Pink Glo, -01 Orange Glo, -03 Yellow, -06 White
8109	Small Flags (2½ x 3½ in.) – 30 in. stakes. Specify color with last two digits: -00 Pink Glo, -01 Orange Glo, -03 Yellow, -04 Red, -06 White
802	Large Flags (4 x 5 in.) – 21 in. stakes. Specify color with last two digits: -11 Blue, -12 White, -13 Red, -14 Blue Glo, -15 Yellow, -16 Orange Glo, -17 Pink Glo, -18 Yellow Glo, -19 Red Glo, 099992 Orange
803	Large Flags (4 x 5 in.) – 30 in. stakes. Specify colors with last two digits: -01 Blue, -02 Orange Glo, -03 Red, -04 White, -05 Yellow, -06 Blue Glo, -07 Pink Glo, -08 Lime Glo, -09 Red Glo, -16 Yellow Glo, -24 Orange, 080298 Green, 099071 Green Glo.
8113	Large Flags (4 x 5 in.) – 36 in. stakes. Specify colors with last two digit: -00 Pink Glo, -01 Orange Glo, -02 Blue, -03 Yellow

Flagging Tape Dispenser

Lightweight, rustproof and fits on a belt or waistband. Holds one roll.

811010 Flaggii	ng Dispenser
------------------	--------------

Stake Whiskers

Packed 25 per bundle. 40 bundles per box.

117 -41 Orange, -50 Red, -51 Blue, -53 Pink Glo, -54 Wh	te, -55 Orange Glo.
---	---------------------


Aerial Flagging

Perfect for aerial mapping jobs where high visibility marking is needed for photography. Sold by the roll.

10164	White Roll, 300 ft. x 12 in.	
-------	------------------------------	--



8110__/8112__







Surveying Markers

Mag Nails

Revolutionary new metal formula doubles or quadruples detection by metal detectors by retaining magnetism. Larger center point for easier driving. Packaged in boxes of 100.

813345	³ / ₄ x ¹ / ₈ in.
813346	1 x ⁵ /32 in.
813347	1 ¹ / ₄ x ³ / ₁₆ in.
813348	1 ¹ / ₂ x ¹ / ₄ in.
813349	2 x ¹ / ₄ in.
813350	2 ¹ / ₂ x ¹ / ₄ in.



Stake Tacks

Steel, 7/8 in. long tacks with indented head to guide plumb bob point. Approximately 725 per 1 lb. box.

813270	Stake Tacks
096000	Tack Ball



Nail Markers

One-inch squares made of plastic impregnated nylon in florescent orange. Approximately 70 per package.

811501	Nail Markers with 1/4 in. hole
811502	Nail Markers with 1/8 in hole



Monument Spikes

Large monument spike 3% in. square shank. Galvanized with chisel point and button head. Makes ideal bench mark or turning point.

813262	6 in. Monument Spike
813264	8 in. Monument Spike



MAG SPIKES®

Made from Chrisnik combination of premium steel that produces the most durable survey marker in the industry. Like the MAG NAIL you can Pound it Harder and Find it Farther! The MAG SPIKE is magnetized for easy detection. Its large center point and 1" diameter head makes it great for control points and property corners.

1029998-01	MAGSPIKE 6 in. 20 per box
1029999-01	MAGSPIKE 8 in. 20 per box



Lead Wire

For lead and tack reference points. Fits hole cut by No. 813089 concrete drill. Diameter: 3/8 in., Length: 15 in.

813220	Lead Wire

Flat Survey Markers (Made in USA)

Cast from solid brass. Ribbed shank prevents turning or loosening. Non-glare finish, 1/8 in. thick top. Shank area 0.4 sq. in., length: 2 in.

813400	1 ³ / ₈ in. Top Diameter
813403	2 in. Top Diameter
813406	2 ¹ / ₂ in. Top Diameter
813408	3 in. Top Diameter
813408-SF	3 in. Top Diameter Satin Finish



Domed Survey Markers (Made in USA)

Solid brass with curved heads. Ribbed shank prevents turning or loosening. Shank area: 0.4 sq. in.; shank length: 2 in.

813410	1 ³ / ₈ in. Top Diameter
813413	2 in. Top Diameter
813416	2 ¹ / ₂ in. Top Diameter
813418	3 in. Top Diameter



Surveyor's Raised Shiners

Tin, 11/4 in. diameter with center punch and crimped edges. Especially valuable for indicating semi-permanent points with spikes or nails. 1 lb. carton. Approximately 250 per box.

813431	Raised Shiners



Mag Hubs

The Mag Hub is magnetized for easy detection and zinc plated to resist corrosion. It has a large center point and is easy to carry. Not for use in concrete or asphalt. 30 lb. box. 1/4 in. diameter.

813351	4 in. Mag Hub Nail
813352	6 in. Mag Hub Nail
813353	8 in. Mag Hub Nail



Surveyor's Flat Shiners

Tin, 2¹/₄ in. diameter with center punch and crimped edges. Especially valuable for indicating semi-permanent points with spikes or nails. 3 lb. carton.

813430	Flat Shiners
--------	--------------



Plumb Blobs













Plumb Bobs

Screw caps and hardened steel points with standard threads. Storage space for an extra point inside the cap.

812212	12 oz. Plumb Bob
812214	14 oz. Plumb Bob
812216	16 oz. Plumb Bob
812218	18 oz. Plumb Bob
812224	24 oz. Plumb Bob
812290	Extra Point (fits all listed plumb bobs)
812293	Extra Cap (fits all listed plumb bobs)

Plumb Bob Cords

Made with the finest quality braided cord.

812413	White Poly; 50 yd. Spool
812423	Orange Poly, 50 yd. Spool
812439	Fluorescent Yellow Poly, 50 yd. Spool

Leather Scabbards

Rugged leather with stitched and riveted pockets that hold tape or Gammon Reel and a 16 or 18 oz. plumb bob.

812365	Leather Scabbard for Gammon Reel and Plumb Bob	
Extra-heavy stitched and riveted pocket.		
812350	Belt for Plumb Bob Scabbard	
812315	Scabbard for 10–14 oz. Plumb Bobs	
812325	Scabbard for 16–18 oz. Plumb Bobs	Π
812335	Scabbard for 24–32 oz. Plumb Bobs	П

Tally Register

Four-digit capacity with quick return to zero.

879200	Tally Register
0/ 0200	I fally Negister

Gammon Reels

Handy, retracting plumb bob cord reel means no more winding and no more broken or muddy string. Includes 72 lb. test nylon string that weighs $1^{1/2}$ oz.

812448	12 ft. Gammon Reel, Black/Orange
812449	12 ft. Gammon Reel, White/Orange
812450	6½ ft. Gammon Reel, White/Orange
812451	24 yd. Nylon Refill, Red/Orange
812452	24 yd. Nylon Refill, Fluorescent Yellow
812454	24 yd. Nylon Refill, Fluorescent Red

Targets

Available in "Quik-Stik," plastic and translucent plastic variations.

812620	Plastic target notched for attaching to line 21/2 x 4 in., red/white
812625	Translucent Plastic target laminated for brilliant illumination and notched for attaching to line $2^{1/4} \times 4$ in., black/orange
812640	Quik-Stik target with paper back that peels off instantly and sticks to any surface 2 x $3^{1/2}$ in. (package of 25)

Hand Tools



Axes

813035	Estwing® Hand Axe with Leather Sheath, 1.7 lbs.
813015	Bahco Bush Axe 7 ¹ / ₄ in. Swedish Steel Blade, 20 in. Hickory Handle
813016	Bahco Replacement Handle: 20 in.
813017	Bahco Replacement Blade
813019	Hatchet Axe with Leather Sheath (SO)
813005	Hatchet Broad 36 oz. Plumb Axe
813045	Estwing Broad Hatchet, 17 in., 28 oz. (SO)

Hammers

813030	Estwing Hammer: 30 oz.
813065	Estwing Straight Claw Hammer: 16 oz.
813022	Estwing Rock Pick Hammer: 11½ in. Handle, 22 oz.
813023	Sheath for Estwing Rock Pick Hammer
813007	Estwing Long Handle Rock Pick Hammer: 16 ^{1/4} in. Long Handle
813039	Estwing Rock Pick with Leather Wrapped Grip: 13 in. (SO)
813012	Engineering Sledge: 15 in. Handle, 4 lbs.
813013	Engineering Sledge Replacement Handle
813037	Estwing Sledge/Drilling Hammer: 4 lbs.
813038	Estwing Sledge/Drilling Hammer: 3 lbs.
813060	Sledge/Drilling Hammer: 4 lbs., 16 in. Long Handle
813146	Engineer's Hammer: 48 oz.
813018	Sledge Drill Hammer: 10 in. Handle, 4 lbs.

Chisel

813085

813089

813080

813085 Estwing Concrete Chisel: ½ x 12 in.

Concrete Drill

813089 Concrete Drill: 10 x 5/8 in., "V" Edge

Gad

813080 Gad: ³/₄ x 1³/₄ x 18 in.

Frost Pin

813079 REDTOP Frost Pin: 1 in. Diameter, 1³/₄ in. Button Top, 18 in. Long, 4 lbs.

Hand Tools

Machetes

813000	Seymour [®] 22 in. Machete
813001	Leather Sheath for 22 in. Machete
813002	Canvas Sheath for 22 in. Machete

813002 813001

Ditch Bank Blade

813008	Ditch Bank Blade: 16 in. Blade, 10 in. Handle
813009	Replacement Handle

Bush Hook

813010	Bush Hook: 12 in. Single Edge, 36 in. Handle
813011	Replacement Handle

Manhole Cover Pick

813081	REDTOP Heavy Duty Manhole Cover Pick Diamond
	Point: 31 in. Long

Protractor

812911	Small Angle Magnetic Protractor Full-view MONO-VIAL®; dial graduated to 5°; magnetic base
	and durable Polycast® construction

Levels

812910	Line Level: 3 in. Long

Tool Pouches

818116	7-Pocket Tool Pouch
818115	Leather Tool Pouch







Marking

Dixon Redimark® Marker

Tight-seal, no-roll cap makes marker last longer; stores on base when not in use. Chisel point is ideal for marking on wood, metal, glass, plastic or paper. Aluminum body gives 30% more volume. Sold by the dozen.

813471	Black Dixon Felt Tip Marker
813472	Red Dixon Felt Tip Marker



For marking steel, concrete, stone, lumber and almost any other surface.

813050	Carbide Point Scriber; 5 ¹ / ₄ in.
813051	Replacement Scriber Point (6 per package)
813053	Premium Scribe; 5 in.
813054	Giant Scribe
813055	Replacement Tip for 813053/813054 (6 per package)



NuMark® Valve Based Marking Pens

Very Long shelf life 10 Year Shelf-Life guarantee!*
Durable long-wear tip (replaceable)
Generous Ink supply
Valve Action flow control
Dense long lasting Ink (UV resistant)
Fast drying solvent carrier*
Writes on Wet and Oily surfaces
Secure screw-on cap with pocket clip
Cap storage on end of marker
Made in the U.S.A.

1031409-01	NuMark Marker PM2000, Black
1031410-01	NuMark Marker PM2000, Red
1031411-01	NuMark Marker SF500 Xylene Free, Black
1031412-01	NuMark Paint Pen PT2000, Red
1031413-01	NuMark Paint Pen PT2000, White
1031414-01	NuMark Repl Felt Tip, PK12
1031415-01	NuMark Repl Paint Tip, PK6



Dixon® Lumber Crayons

For marking steel, concrete, stone, lumber and almost any other surface. Length: $4^{1}/2$ in.; diameter: 1/2 in. Packed 12 per box; sold by the box.

813461	Carbon Black Crayon
813462	Yellow Crayon
813463	Red Crayon
813464	Fluorescent Pink Crayon
813465	Blue Crayon
813467	White Crayon

Dixon® Wood Crayon Holder

813468	Wood Crayon Holder



Paint

Aervoe Marking Paint (17 oz.)

- Aervoe's Survey Marking Paint offers the best in color visibility and retention, durability, and a lasting mark of up to six months
- Non-freezing and operational to 14°F
- Colors are formulated to meet standards set by OSHA and APWA/One Call Systems
- Mark is visible for up to six months depending on traffic and exposure
- Adheres to many surfaces including wood, concrete, asphalt, brick and gravel
- Not recommended for use on turf surfaces

813454	Flo Orange #222
813460	Flo Pink #229
1023876-01	Flo Blue #227
1023877-01	White #207



Lightweight durable steel and plastic construction with a comfortable grip for easy marking.

813958	Marking Wand, 24 in. Handle
013330	I IVIAI KII IS VVAI IU, 24 III. HAI IUIE

Spray Paint Marking Pistol

Use with marking paints for increased accuracy and no mess. Light touch spray control. Easy loading.

813959	Marking Pisto	ı








Safety and Common Accessories

Hard Hats

High-density polymer for excellent protection against severe impact. Molded in one piece with no metal; protects against corrosive materials. Meets ANSI Z89. 1-196 (Class A) — $\,$

Federal Spec GGG-H-14t2g. Fits sizes 63/8 through 8. Weight: 11 oz.


813630	Yellow
813631	White



High-density polymer for excellent protection against severe impact. Molded in one piece with no metal; protects against corrosive materials. Meets ANSI Z89. 1-196 (Class A) —

Federal Spec GGG-H-14t2g. Fits sizes 63/8 through 8. Weight: 11 oz.

813630	Yellow
813631	White



63 in. spread and 8 ft., 3-section pole with baked aluminum enamel finish.

813640	Heavy-drill fabric umbrella; blue and yellow
813641	Water resistant vinyl umbrella; yellow with blue logo
813642	Replacement Pole for 813640/813641, diameter 1 ¹ / ₄ in. (SO)

First Aid Kits

The jobsite kit is designed to serve most minor first aid issues for up to 25 people. The truck kit is designed for up to 10 people.

813094	First Aid Kit (Truck) - Antiseptic, first aid cream, bandages, gloves, etc
813095	First Aid Kit (Jobsite) - Antiseptic, first aid cream, bandages, gloves, eye wash, insect sting wipes, etc

Common Sokkia Cables - Batteries - Chargers

210160056	BDC35A (SET x100 Series, PowerSET)
60901-SURSK	BDC46A (RCPR3/4/5, SDL30/50, SET 30R series)
221007000-SURSK	BDC70 (SX, SRX, NET, CX, FX)
210160091-SURSK	CDC68 Charger (for BDC70 and BDC46)
51288-SURSK	Hirose to 9pin cable (older SET's, Gowin, Cygnus, SET60)
635039	DOC27 USB to Hirose (USB adaptor for Hirose connector to go to USB port)
1001550-01-SURSK	DOC210E (SX, CX, FX to 9 pin)
1013452-01	Cable, DOC210E to USB
1028985-01-SURSK	Stylus, FC/SHC-5000 Grounded









Safety and Common Accessories

Common iX Robotic Accessories

210160124	EDC113B 115VAC Power Cable for CDC68/70
221213900	1EDC139 AC adapter (input voltage : 100 to 240VAC)
221221100	2EDC211 Y cable for external battery BDC60/61, PC and ES/CX
221221200	EDC212 Y cable for EDC139 AC adapter, PC and ES/CX/ OS/FX PC connector
221221300	EDC213 Cable for Car battery(alligator) and ES/CX/OS/FX
210150025	DIAGONAL EYEPIECE 27 (DE27) Magnif 30x
221928000	EL7 Telescope Eyepiece Lens 40x
210160164	OF3A Solar filter flip type (Special Order)
221840700	CP7 Tubular compass
1011931-01	DE30 Diagonal Eyepiece
1014814-01	OF4 Solar Filter
1013160-01	L08C Circular Level
1026194-01	CASE, HARD IX W/FUSION NEW
1026192-01	SURSK CASE, HARD GT W/FC-5000 AND RC-5 H/P NEW



Safety Vests

We've gone full circle to give you the most pockets, grommets, storage, hangers, and venting to make this vest perform to the demanding expectations of the surveying and construction industry. Besides surveyors, we find that hunters, police officers, foreman, and all types of industry professionals are coming to us. They are demanding the best gear that is also ANSI/CSA compliant. THE Party Chief vest tells people you're serious about your job.

1027988-01	1SVX PARTY CHIEF VEST, ORANGE, L
1027989-01	1SVX PARTY CHIEF VEST, ORANGE, XL
1027990-01	VX PARTY CHIEF VEST, ORANGE, 2XL
1027991-01	PC15X PARTY CHIEF VEST, ORANGE, L
1027992-01	PC15X PARTY CHIEF VEST, ORANGE, XL
1027993-01	2PC15X PARTY CHIEF VEST, ORANGE, 2XL
1027994-01	SVX PARTY CHIEF VEST, YELLOW, L
1027995-01	SVX PARTY CHIEF VEST, YELLOW, XL
1027996-01	SVX PARTY CHIEF VEST, YELLOW, 2XL
1027997-01	PC15X PARTY CHIEF VEST, YELLOW, L
1027998-01	PC15X PARTY CHIEF VEST, YELLOW, XL
1028025-01	PC15X PARTY CHIEF VEST, YELLOW, 2XL



Safety and Common Accessories

Traffic Cones

High-intensity fluorescent red-orange PVC cone with weighted base for stability.

813612	12 in. Traffic Cone
813618	18 in. Traffic Cone
813619	28 in. Traffic Cone



Non-Reflective "SURVEY CREW" Sign

Non-reflective, high-visibility orange sign with rib support. Roll-up design for daytime use. Stand sold separately.

813652	36 in. SURVEY CREW non-reflective sign
813653	48 in. SURVEY CREW non-reflective sign
813656	Replacement Rib Set 36 in.
813657	Replacement Rib Set 48 in.



Reflexite "SURVEY CREW" Sign

Reflexite Super Bright™ orange sign with rib supports. Roll-up design for day and night visibility. Stand sold separately.

813654	36 in. SURVEY CREW Reflexite sign (SO)
813655	48 in. SURVEY CREW Reflexite sign (SO)
813656	Replacement Rib Set 36 in.
813657	Replacement Rib Set 48 in.

Uniflex Screwlock Sign Stand

NCHRP-350 approved design. Single heavy-duty coil spring to hold 36 in. and 48 in. signs. Kick-release adjustable legs for easy setup. Stand only. Sign sold separately.

813651	Uniflex Screwlock Sign Stand



T-50 Economy Tripod Sign Stand

NCHRP-350 approved design with roll-up signs on low speed roadways. Holds 36 in. or 48 in. signs. For day and night visibility. Stand only. Sign sold separately.

042650	T 50 Feet and Triand City City of	
813650	T-50 Economy Tripod Sign Stand	

Caution Tape

Caution tape; yellow; 3 mil, 1,000 ft.

811050	Caution Tape (1 roll)
--------	-----------------------



SOKKIA

16900 W. 118th Terrace • Olathe, KS 66061 800.4.SOKKIA • www.sokkia.com SOK-1017 Rev F 5/19